

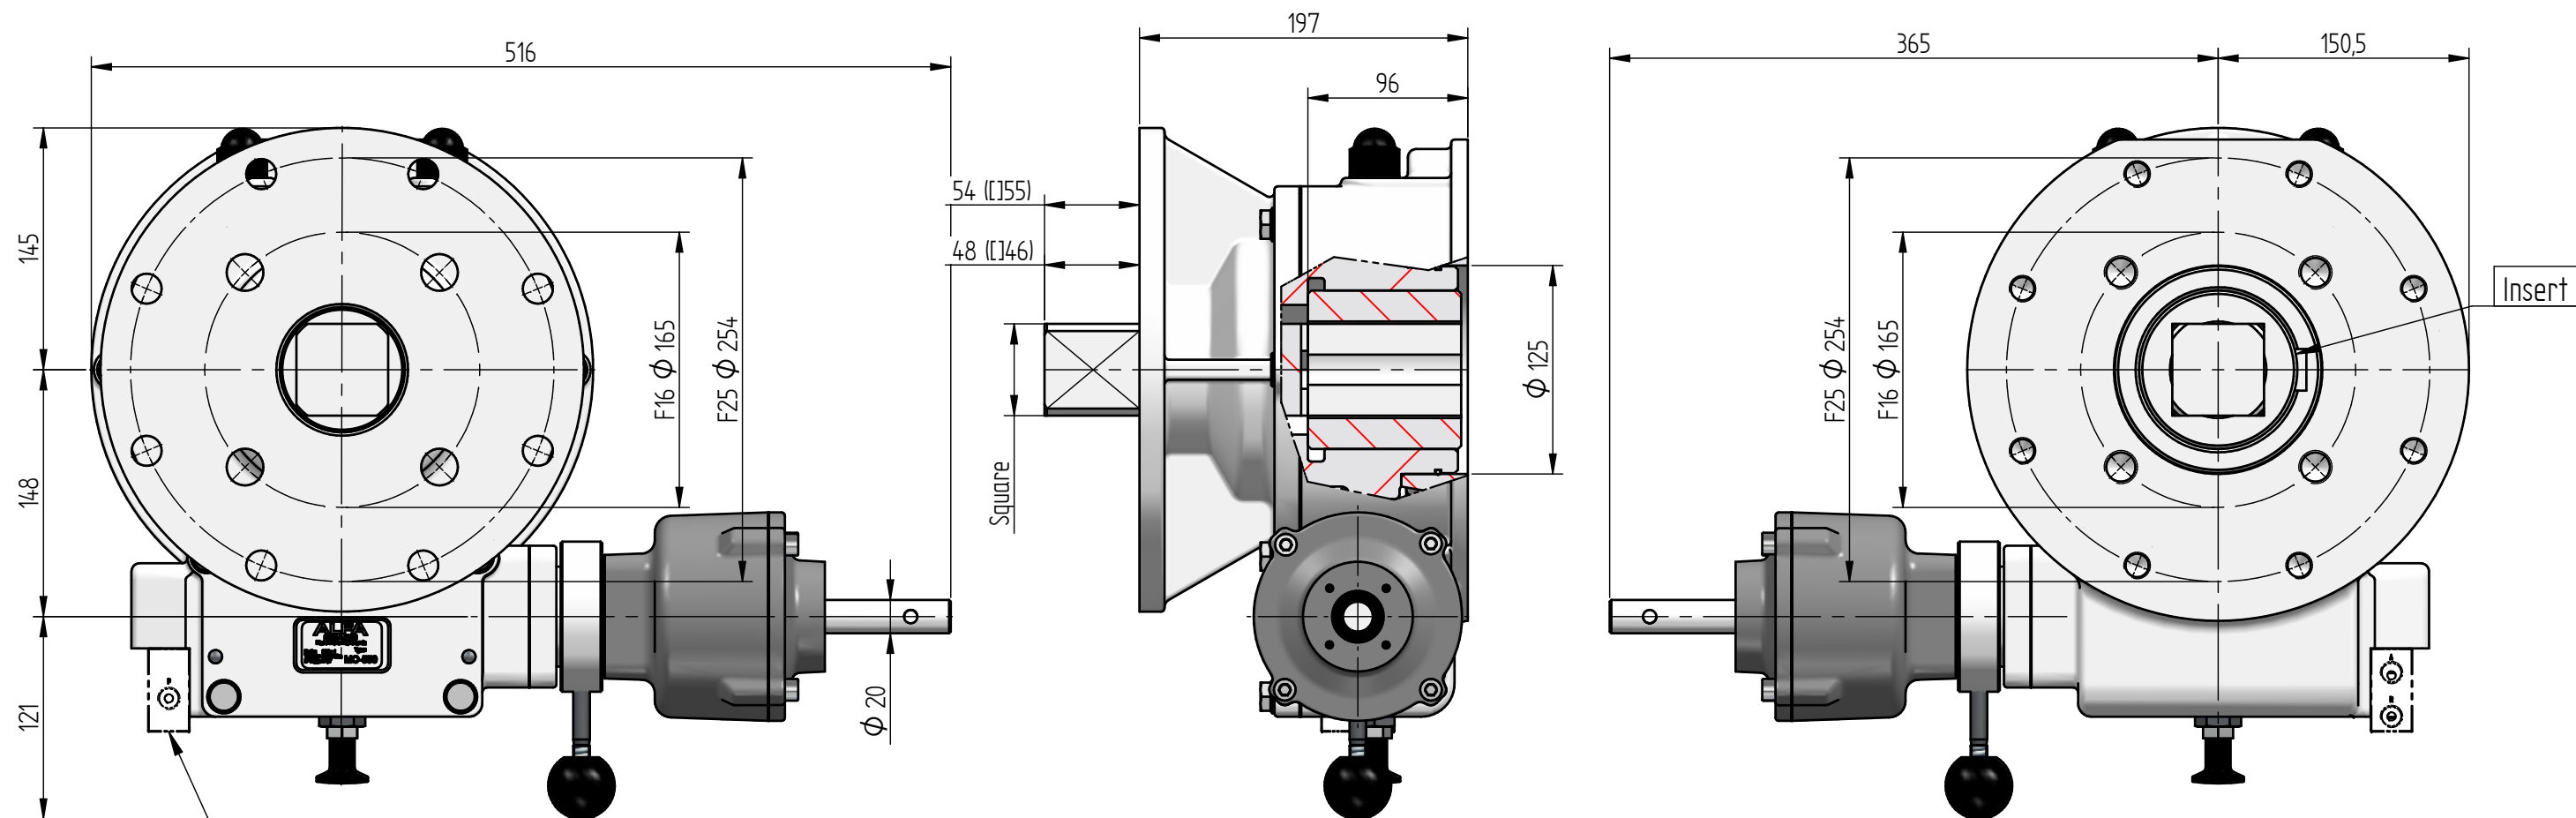


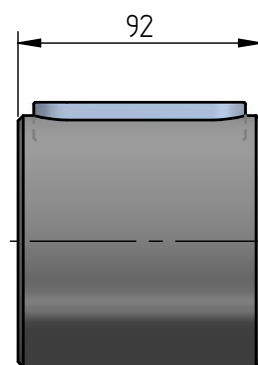

Relief Valve (Optional)

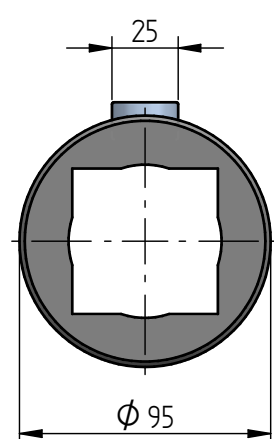

TYPE	Torque	Ratio	MA ± 15%	Weight (Kg)
MO850	8.500 Nm	1 : 408	26.8	64

CONNECTION	ISO	Bore	Square 90°
Valve	F16-F25	STAR	55
Actuator	F16-F25	SQUARE	46-55

Description	Material	Specs/Standard
Body	Ductile Cast Iron	GGG40
Cover	Ductile Cast Iron	GGG40
Quadrant	Ductile Cast Iron	GGG40
Worm	Carbon Steel	C45
Shaft	Stainless Steel	SS 420
Gasket	Nitrile	NBR 70
O-rings	Nitrile	NBR 70
Grease	Lithium	EP2
Fasteners	Stainless Steel	A2
Axial Bearing	Steel	AS-AXK