
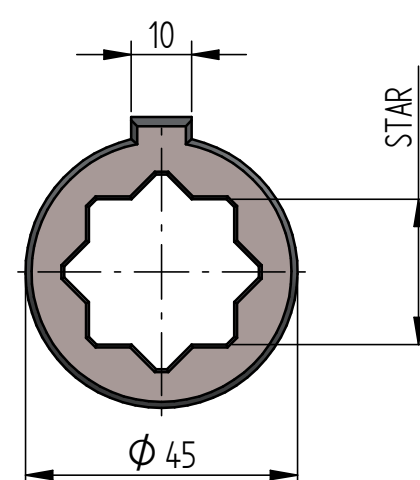
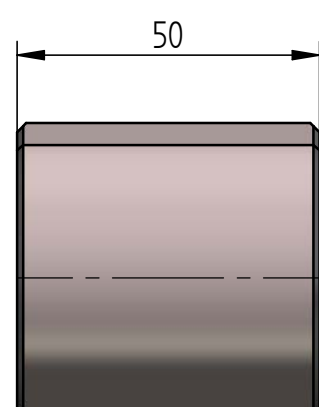
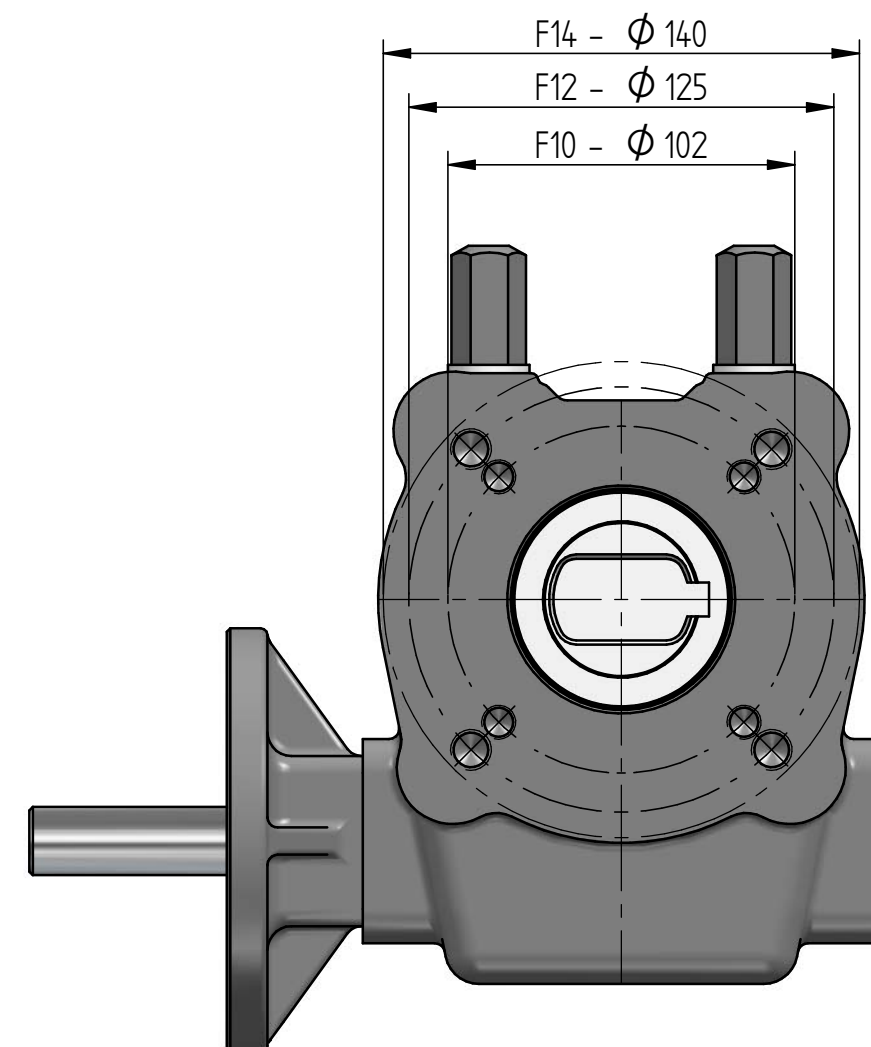
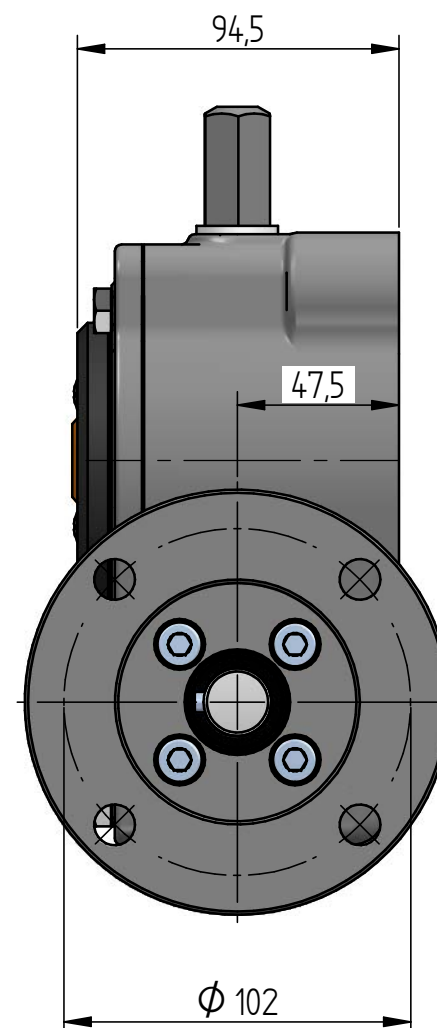


Not for motor use.

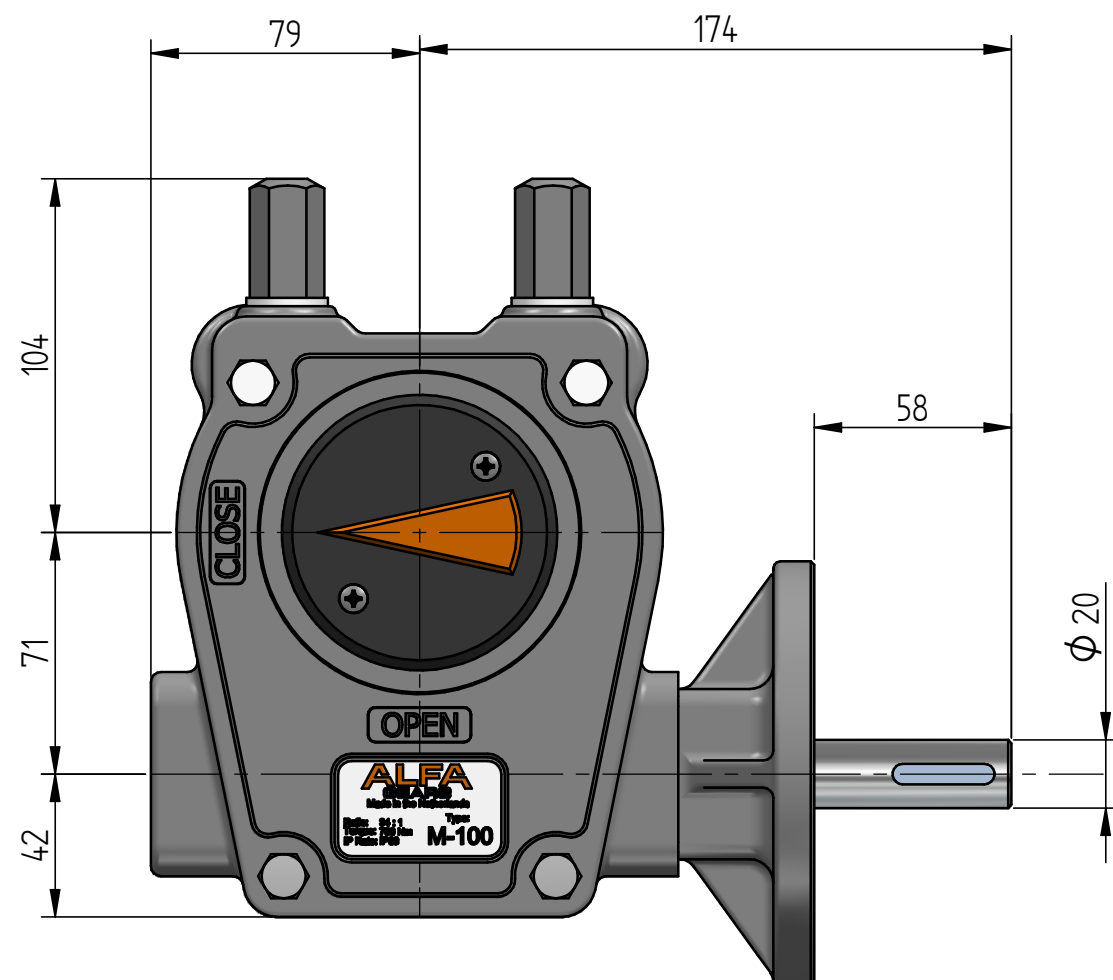


TYPE	Torque	Ratio	MA ± 15%	Weight (Kg)
M100	1000 Nm	1 : 34	9.2	12.0

TYPE	Bore	Square
Quadrant	Max. 45 key	Max. [] 36= or []
Insert	--	STAR 24-27


Description	Material	Specs/Standard
Body	Ductile Cast Iron	GGG40
Cover	Ductile Cast Iron	GGG40
Position	Ductile Cast Iron	GGG40
Quadrant	Ductile Cast Iron	GGG40
Worm	Carbon Steel	C45
Shaft	Stainless Steel	SS 304
Gasket	Nitrile	NBR 70
O-rings	Nitrile	NBR 70
Grease	Lithium	EP2
Fasteners	Zinc plated	A2
Axial Bearing	Steel	AS-AXK

Not for motor use.

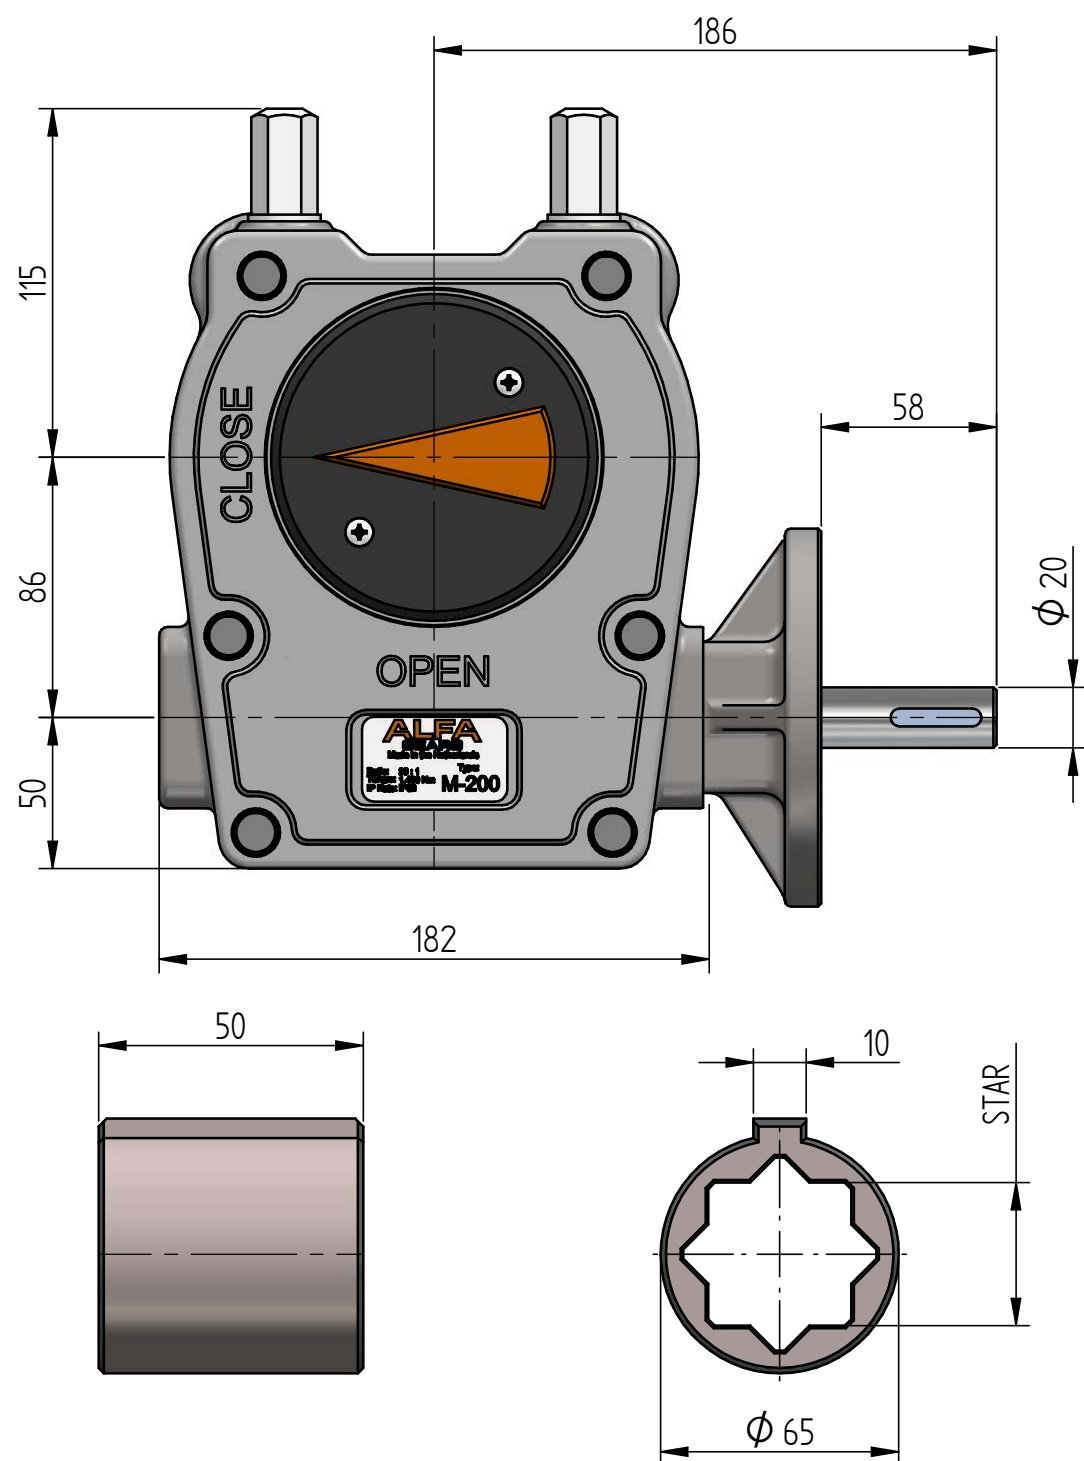






TYPE	Torque	Ratio	MA $\pm$ 15%	Weight (Kg)
M200	2000 Nm	1 : 38	11.45	17.5

TYPE	Bore	Square
Quadrant	Max. $\phi 58$ key	Max. [] 42= or []
Insert	--	STAR 27-30-36

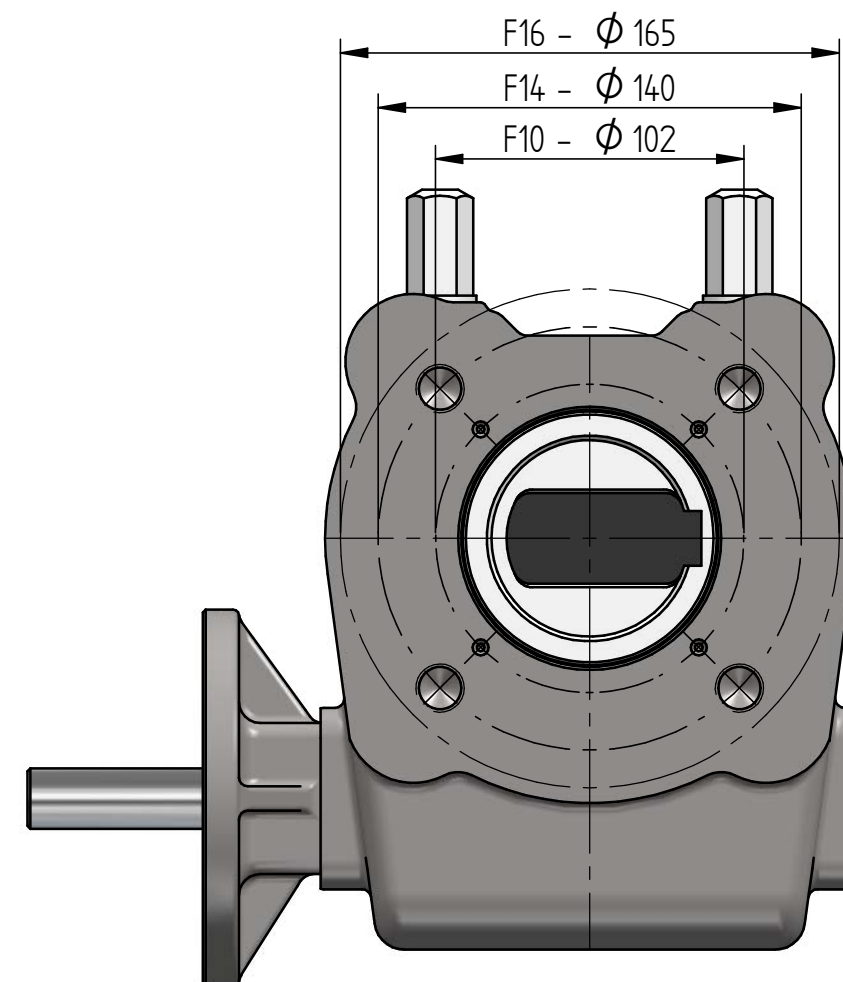

Description	Material	Specs/Standard
Body	Ductile Cast Iron	GGG40
Cover	Ductile Cast Iron	GGG40
Position	Ductile Cast Iron	GGG40
Quadrant	Ductile Cast Iron	GGG40
Worm	Carbon Steel	C45
Shaft	Stainless Steel	SS 304
Gasket	Nitrile	NBR 70
O-rings	Nitrile	NBR 70
Grease	Lithium	EP2
Fasteners	Zinc plated	A2
Axial Bearing	Steel	AS-AXK

Not for motor use.

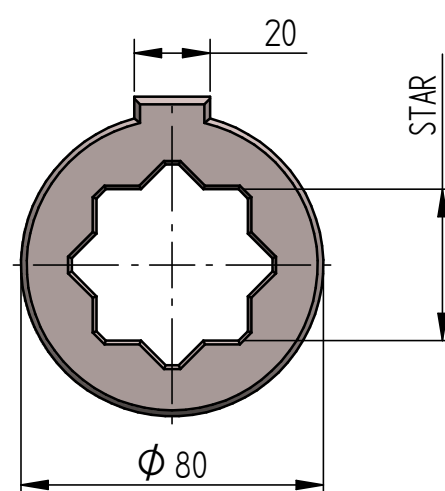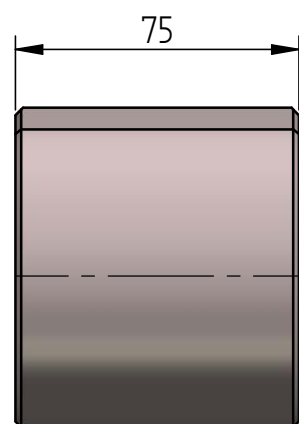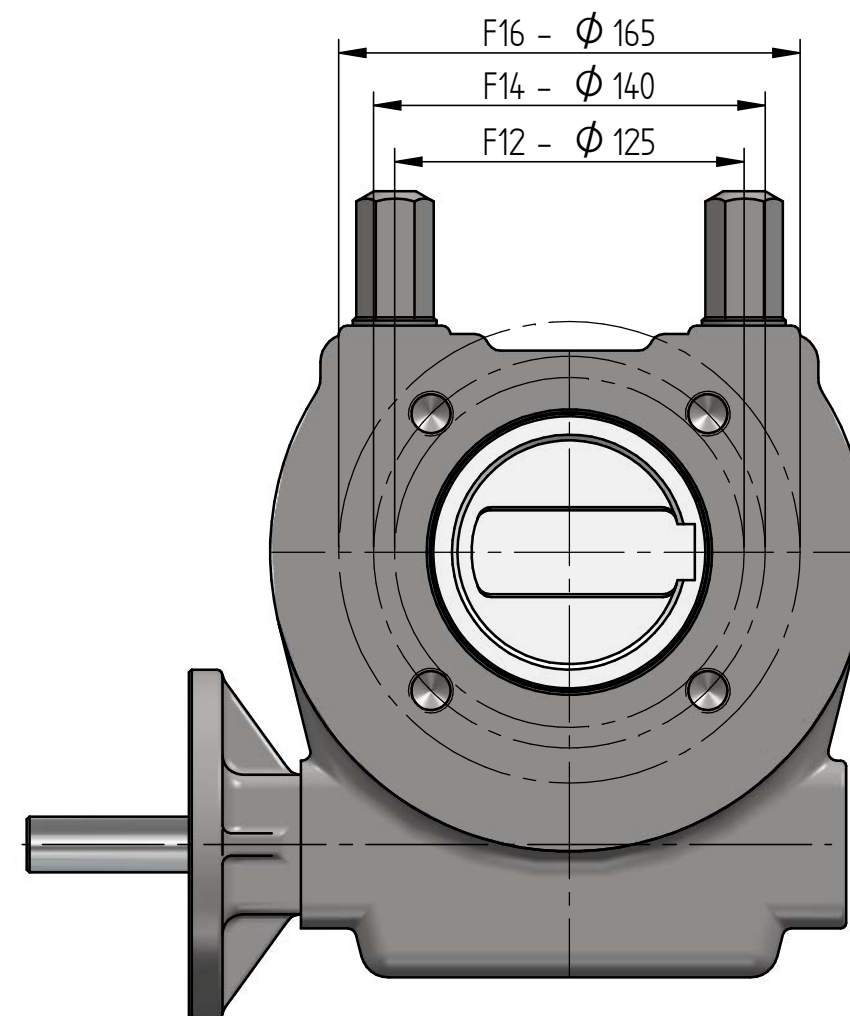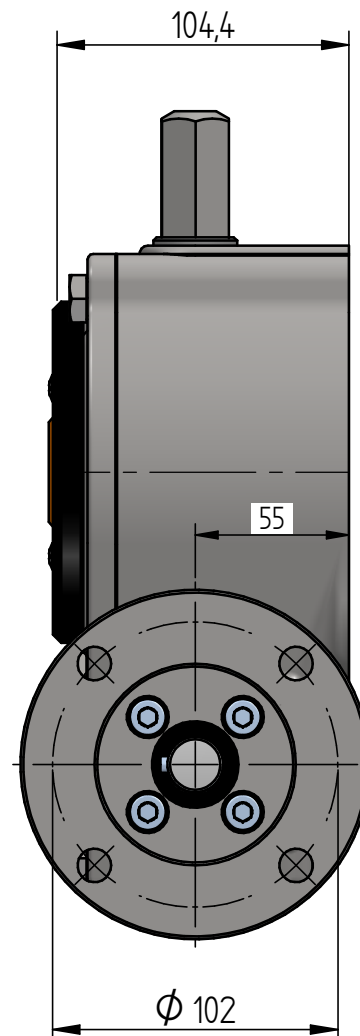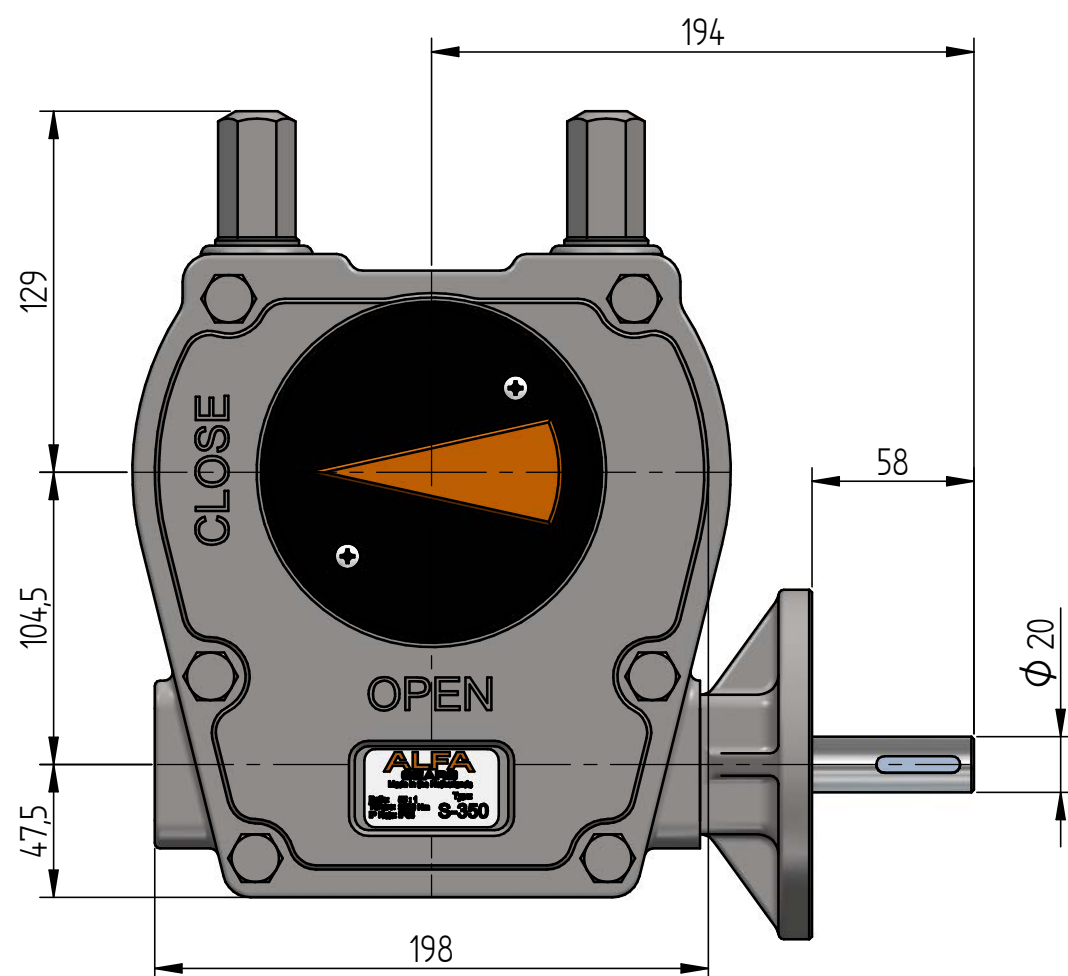


TYPE	Torque	Ratio	MA ± 15%	Weight (Kg)
M350	3500 Nm	1 : 55	17.8	21.0

TYPE	Bore	Square
Quadrant	Max. 75 key	Max. [] 55= or []
Insert	--	STAR 40-46

Description	Material	Specs/Standard
Body	Ductile Cast Iron	GGG40
Cover	Ductile Cast Iron	GGG40
Position	Ductile Cast Iron	GGG40
Quadrant	Ductile Cast Iron	GGG40
Worm	Carbon Steel	C45
Shaft	Stainless Steel	SS 304
Gasket	Nitrile	NBR 70
O-rings	Nitrile	NBR 70
Grease	Lithium	EP2
Fasteners	Zinc plated	A2
Axial Bearing	Steel	AS-AXK

Not for motor use.

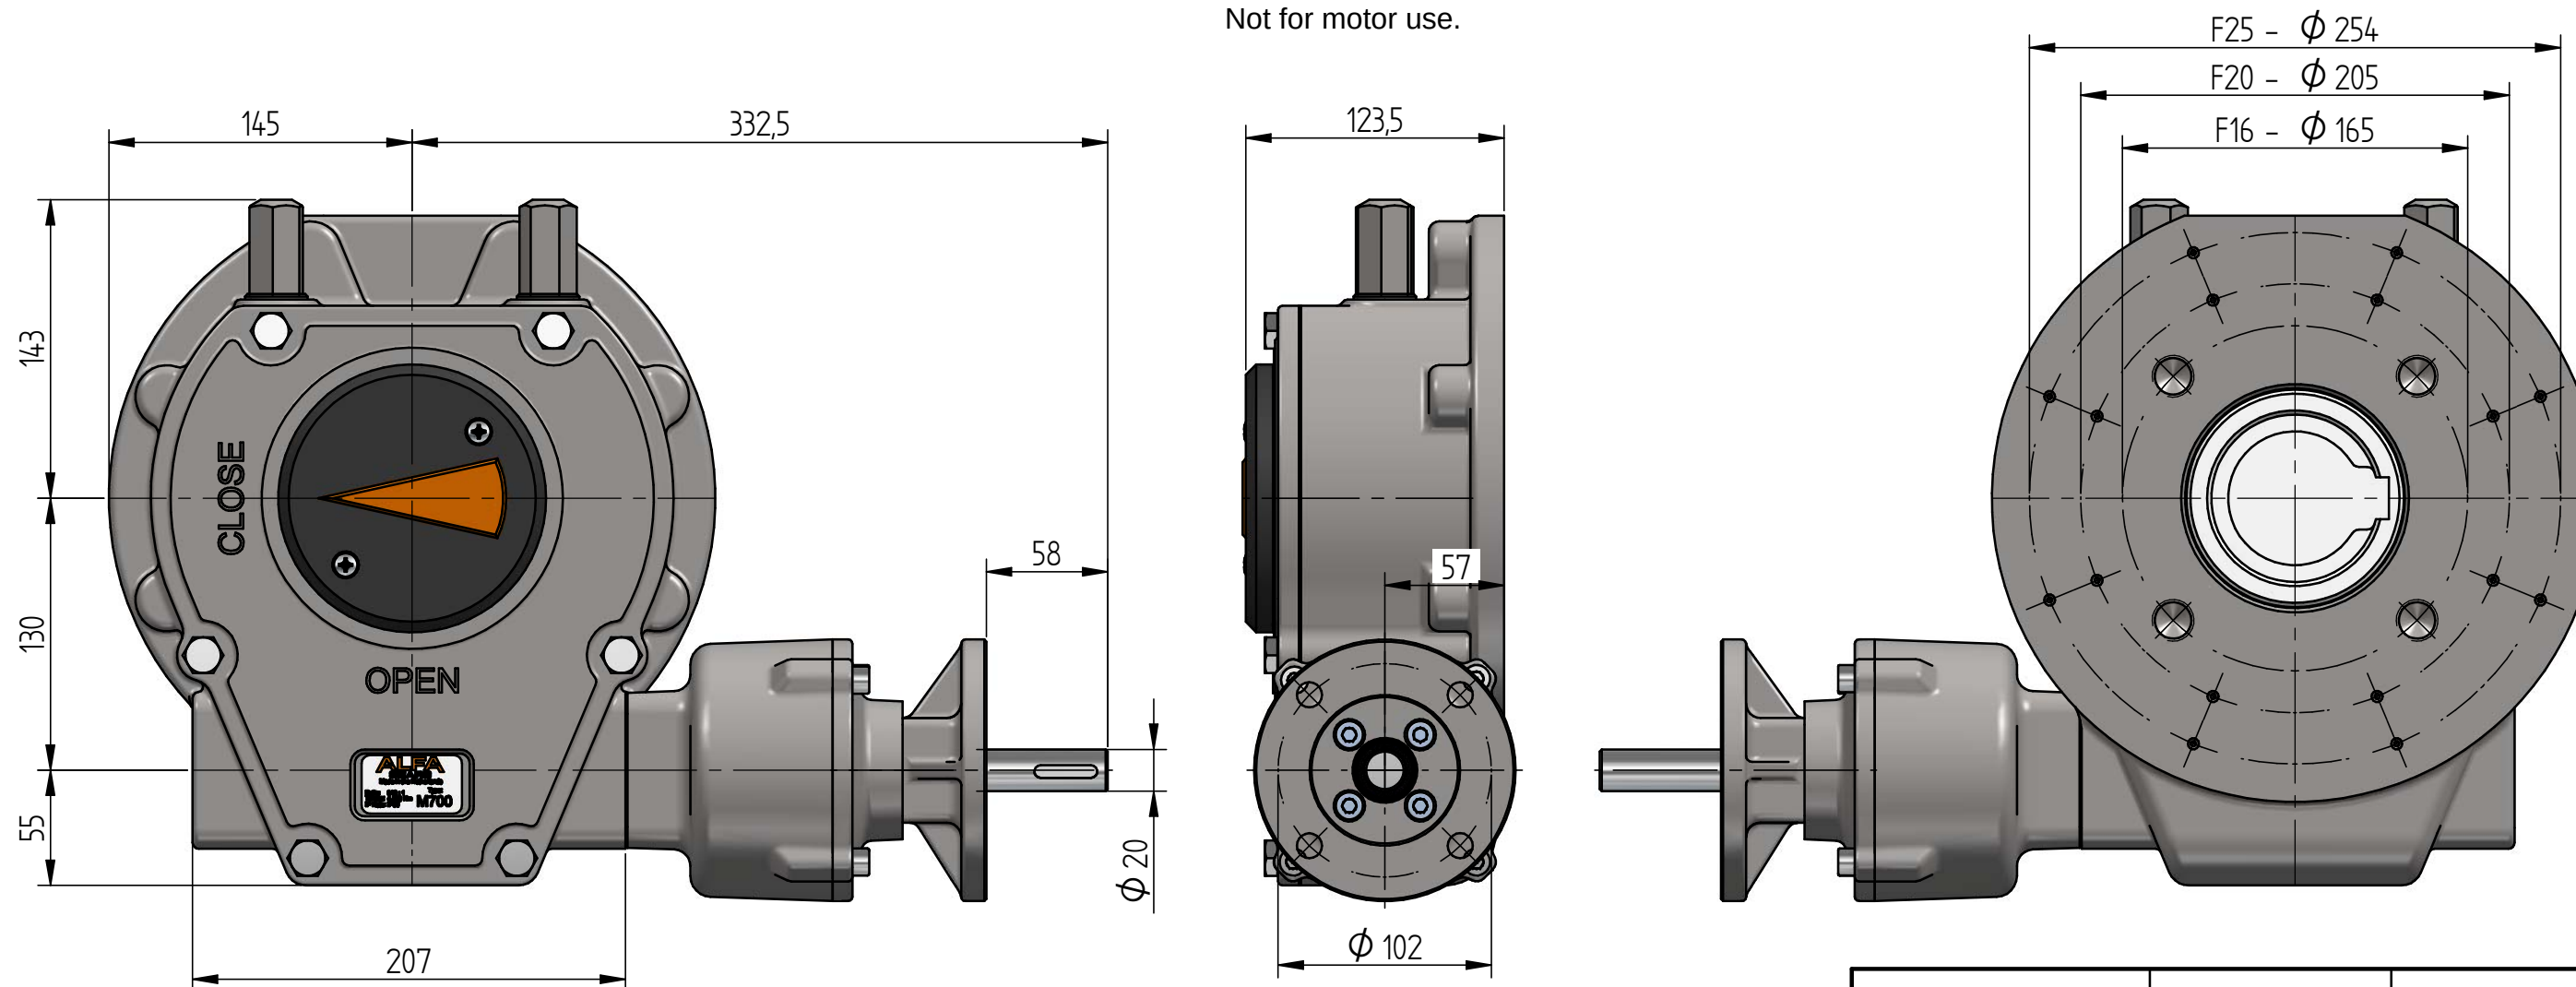

Description	Material	Specs/Standard
Body	Ductile Cast Iron	GGG40
Cover	Ductile Cast Iron	GGG40
Position	Ductile Cast Iron	GGG40
Quadrant	Ductile Cast Iron	GGG40
Worm	Carbon Steel	C45
Shaft	Stainless Steel	SS 304
Gasket	Nitrile	NBR 70
O-rings	Nitrile	NBR 70
Grease	Lithium	EP2
Fasteners	Zinc plated	A2
Axial Bearing	Steel	AS-AXK

TYPE	Torque	Ratio	MA ± 15%	Weight (Kg)
M700	7000 Nm	1: 217	65	40.0

TYPE	Bore	Square
Quadrant	Max. ø80 key 22	Max. [] 58= or []