


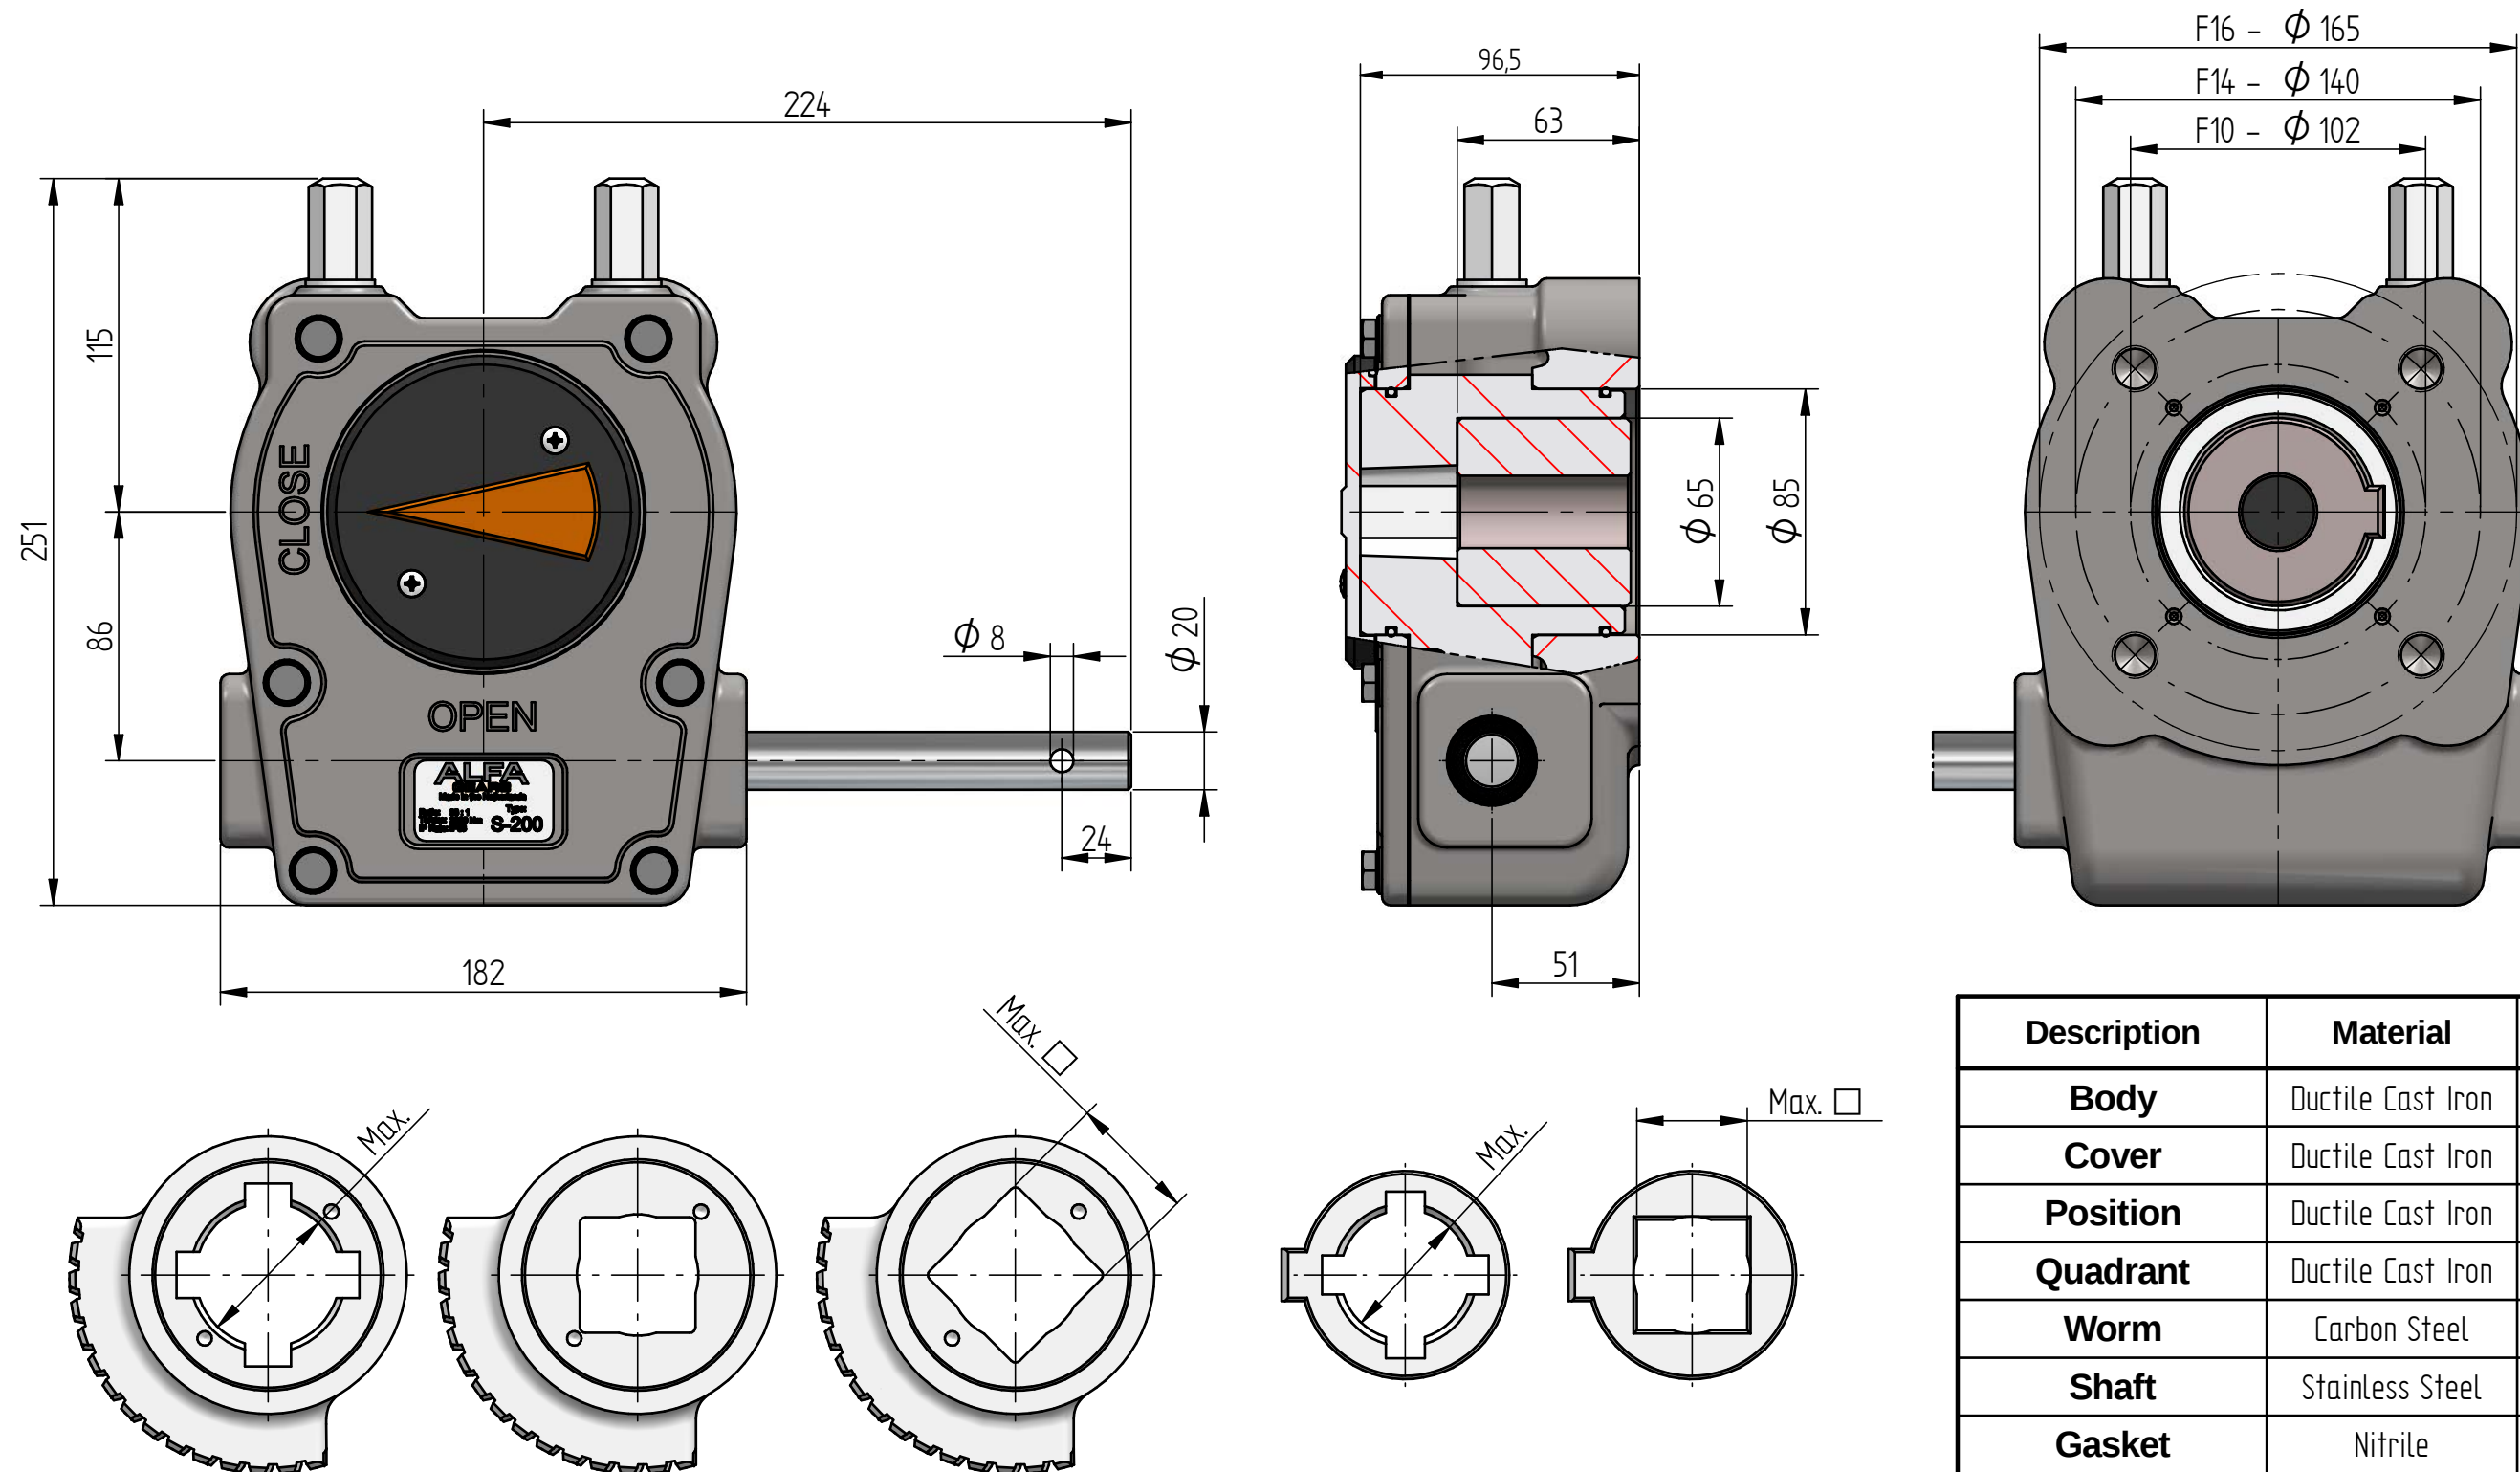

Description	Material	Specs/Standard
Body	Ductile Cast Iron	GGG40
Cover	Ductile Cast Iron	GGG40
Position	Ductile Cast Iron	GGG40
Quadrant	Ductile Cast Iron	GGG40
Worm	Carbon Steel	C45
Shaft	Stainless Steel	SS 304
Gasket	Nitrile	NBR 70
O-rings	Nitrile	NBR 70
Grease	Lithium	EP2
Fasteners	Stainless Steel	A2
Axial Bearing	Steel	AS-AXK

TYPE	Torque	Ratio	MA ± 15%	Weight (Kg)	QUADRANT			INSERT	
S200	2.000 Nm	1 : 38	13.6	15.6	ø 64 Key	SQ 42 =	SQ 48 <45°	ø 42 Key	Square 36