
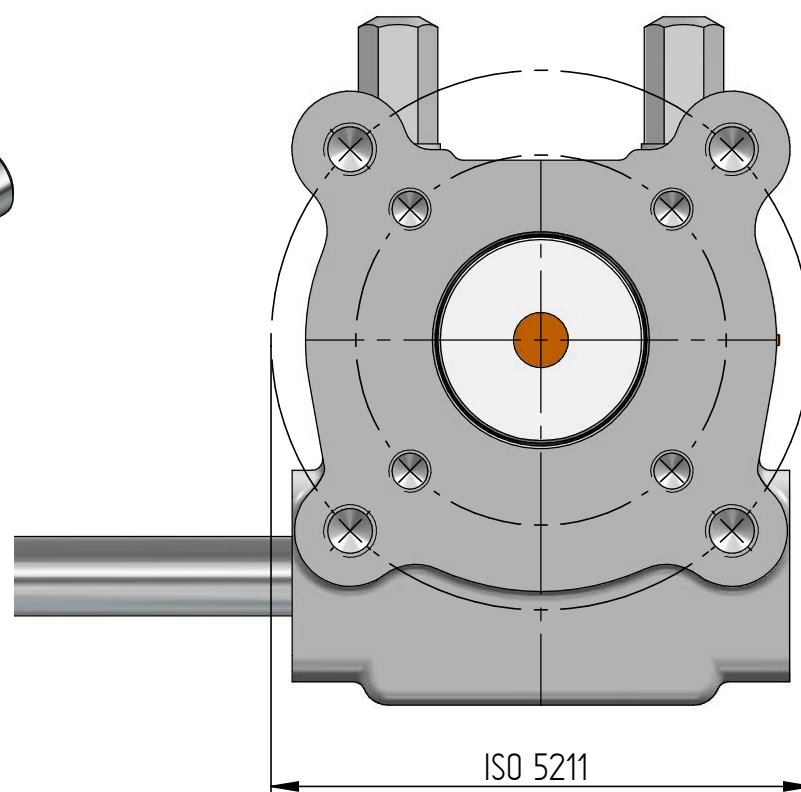
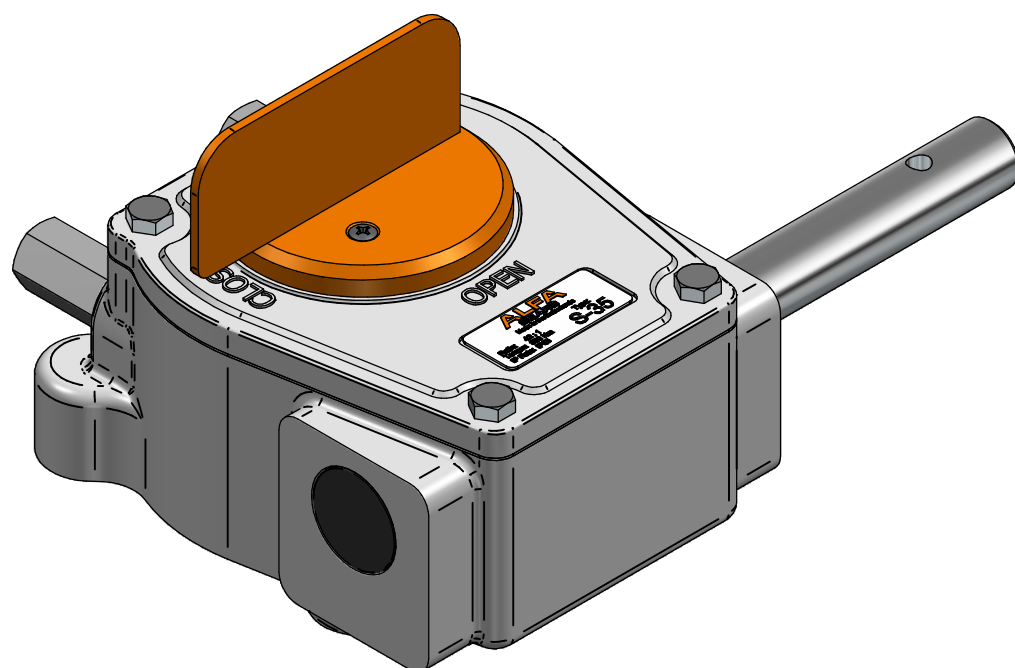
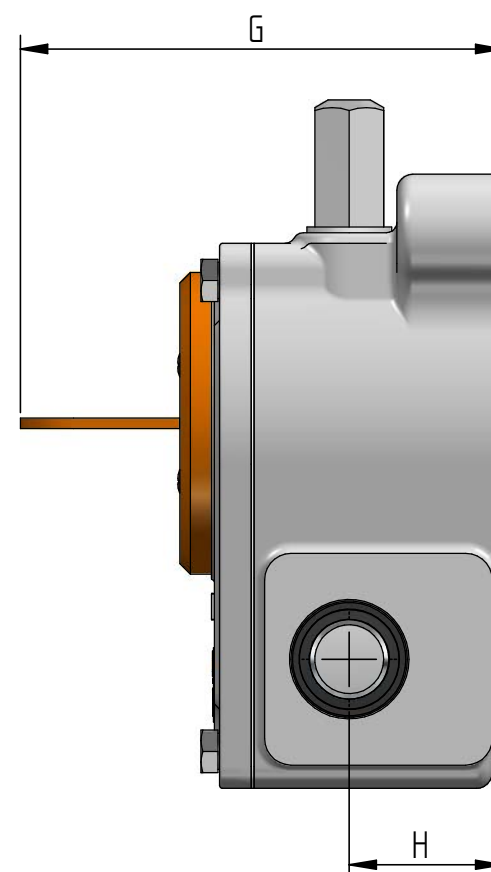


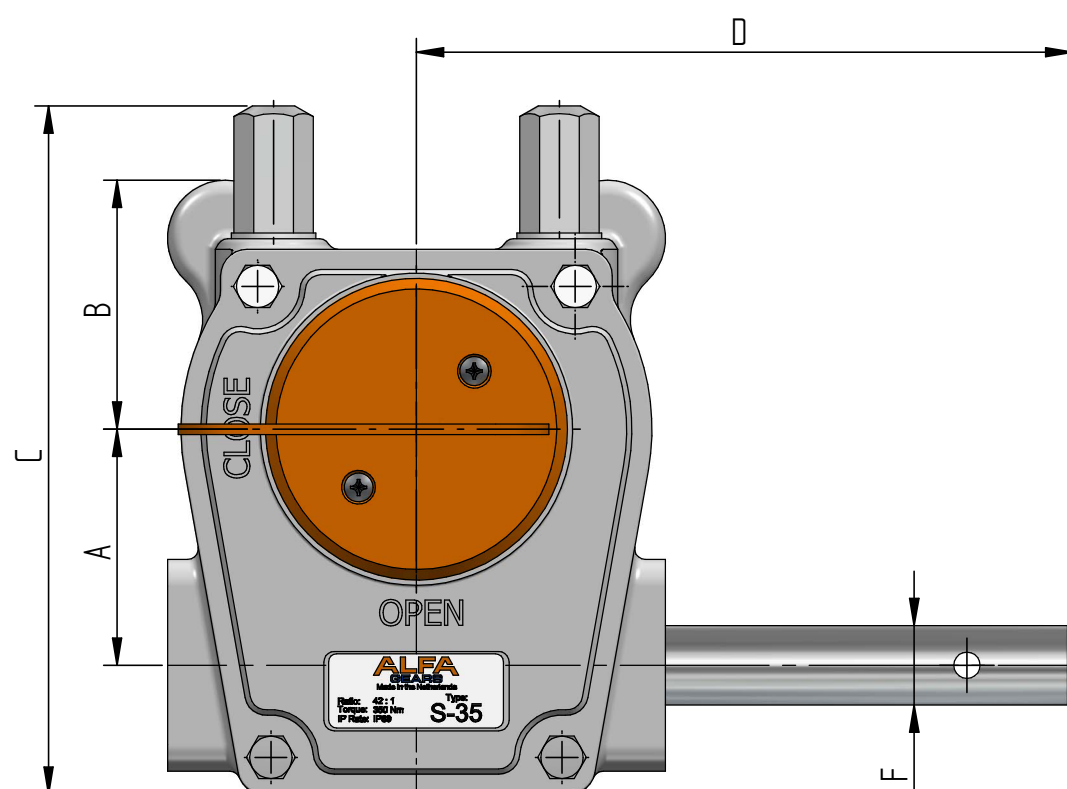

| TYPE        | Torque   | Ratio  | A   | B   | C   | D   | E   | F   | G   | H  | max. Bore | SQUARE | ISO 5211        |
|-------------|----------|--------|-----|-----|-----|-----|-----|-----|-----|----|-----------|--------|-----------------|
| <b>S12</b>  | 120 Nm   | 1 : 41 | 37  | 34  | 111 | 100 | 125 | ø10 | 75  | 24 | ø24       | 17     | F05-F07         |
| <b>S25</b>  | 250 Nm   | 1 : 42 | 45  | 46  | 130 | 124 | 125 | ø12 | 90  | 29 | ø26       | 17     | F05-F07         |
| <b>S35</b>  | 350 Nm   | 1 : 42 | 45  | 48  | 130 | 124 | 125 | ø15 | 90  | 29 | ø26       | 17     | F07-F10         |
| <b>S55</b>  | 550 Nm   | 1 : 40 | 55  | 56  | 164 | 157 | 125 | ø15 | 110 | 36 | ø32       | 22     | F07-F10-F12     |
| <b>S100</b> | 1.000 Nm | 1 : 34 | 71  | 79  | 217 | 201 | 125 | ø20 | 132 | 48 | ø38       | 27     | F10-F12-F14-F16 |
| <b>S200</b> | 2.000 Nm | 1 : 38 | 86  | 105 | 245 | 229 | 125 | ø20 | 150 | 51 | ø50       | 36     | F10-F12-F14-F16 |
| <b>S350</b> | 3.500 Nm | 1 : 55 | 105 | 107 | 278 | 230 | 125 | ø20 | 160 | 55 | ø60       | 46     | F10-F12-F14-F16 |